
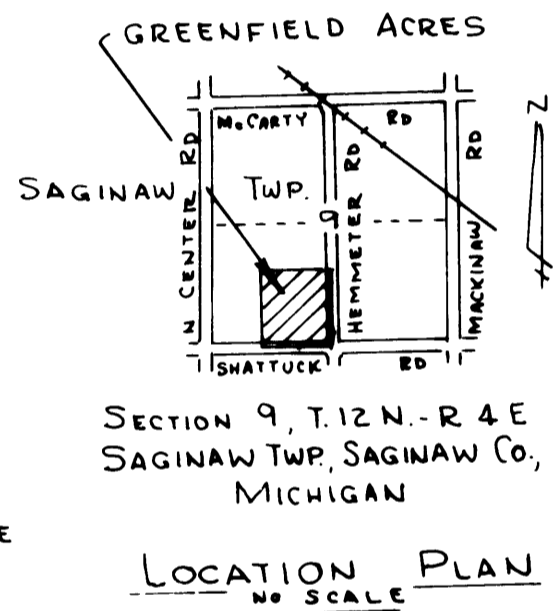
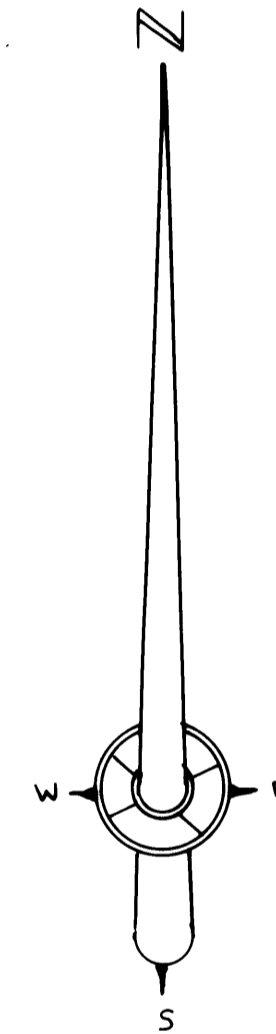


GREENFIELD ACRES

PART OF THE SOUTHWEST 1/4 OF SECTION 9, T.12N.-R.4E.
SAGINAW TOWNSHIP, SAGINAW COUNTY, MICHIGAN

NO	DELTA ANGLE	RADIUS	CURVE DATA		CHORD BEARING	TANGENT
			ARC	CHORD		
1	89°-21'-22"	30.00'	46.79'	42.19'	N 44°-44'-56" W	29.66'
2	89°-21'-22"	63.00'	98.25'	88.59'	N 44°-44'-56" W	62.30'
3	89°-21'-22"	96.00'	149.72'	135.00'	N 44°-44'-56" W	94.93'
4	90°-38'-38"	30.00'	47.46'	42.66'	S 45°-15'-04" W	30.34'
5	90°-38'-38"	63.00'	99.67'	89.60'	S 45°-15'-04" W	63.71'
6	90°-38'-38"	96.00'	151.88'	136.52'	S 45°-15'-04" W	97.08'
7	89°-21'-22"	30.00'	46.79'	42.19'	S 44°-44'-56" E	29.66'
8	89°-21'-22"	63.00'	98.25'	88.59'	S 44°-44'-56" E	62.30'
9	19°-56'-55"	75.00'	26.11'	25.98'	S 80°-35'-55" W	13.19'
10	19°-56'-55"	75.00'	26.11'	25.98'	N 09°-54'-12" E	13.19'
11	129°-15'-12"	75.00'	169.19'	135.53'	S 44°-44'-56" E	158.14'


SPICER ENGINEERING COMPANY
SAGINAW, MICHIGAN
1971

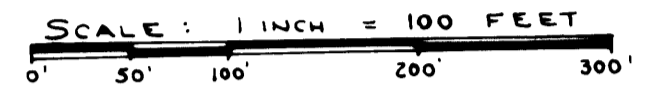

UNPLATTED LAND COMPANY R/W.

UNPLATTED LAND

POWER

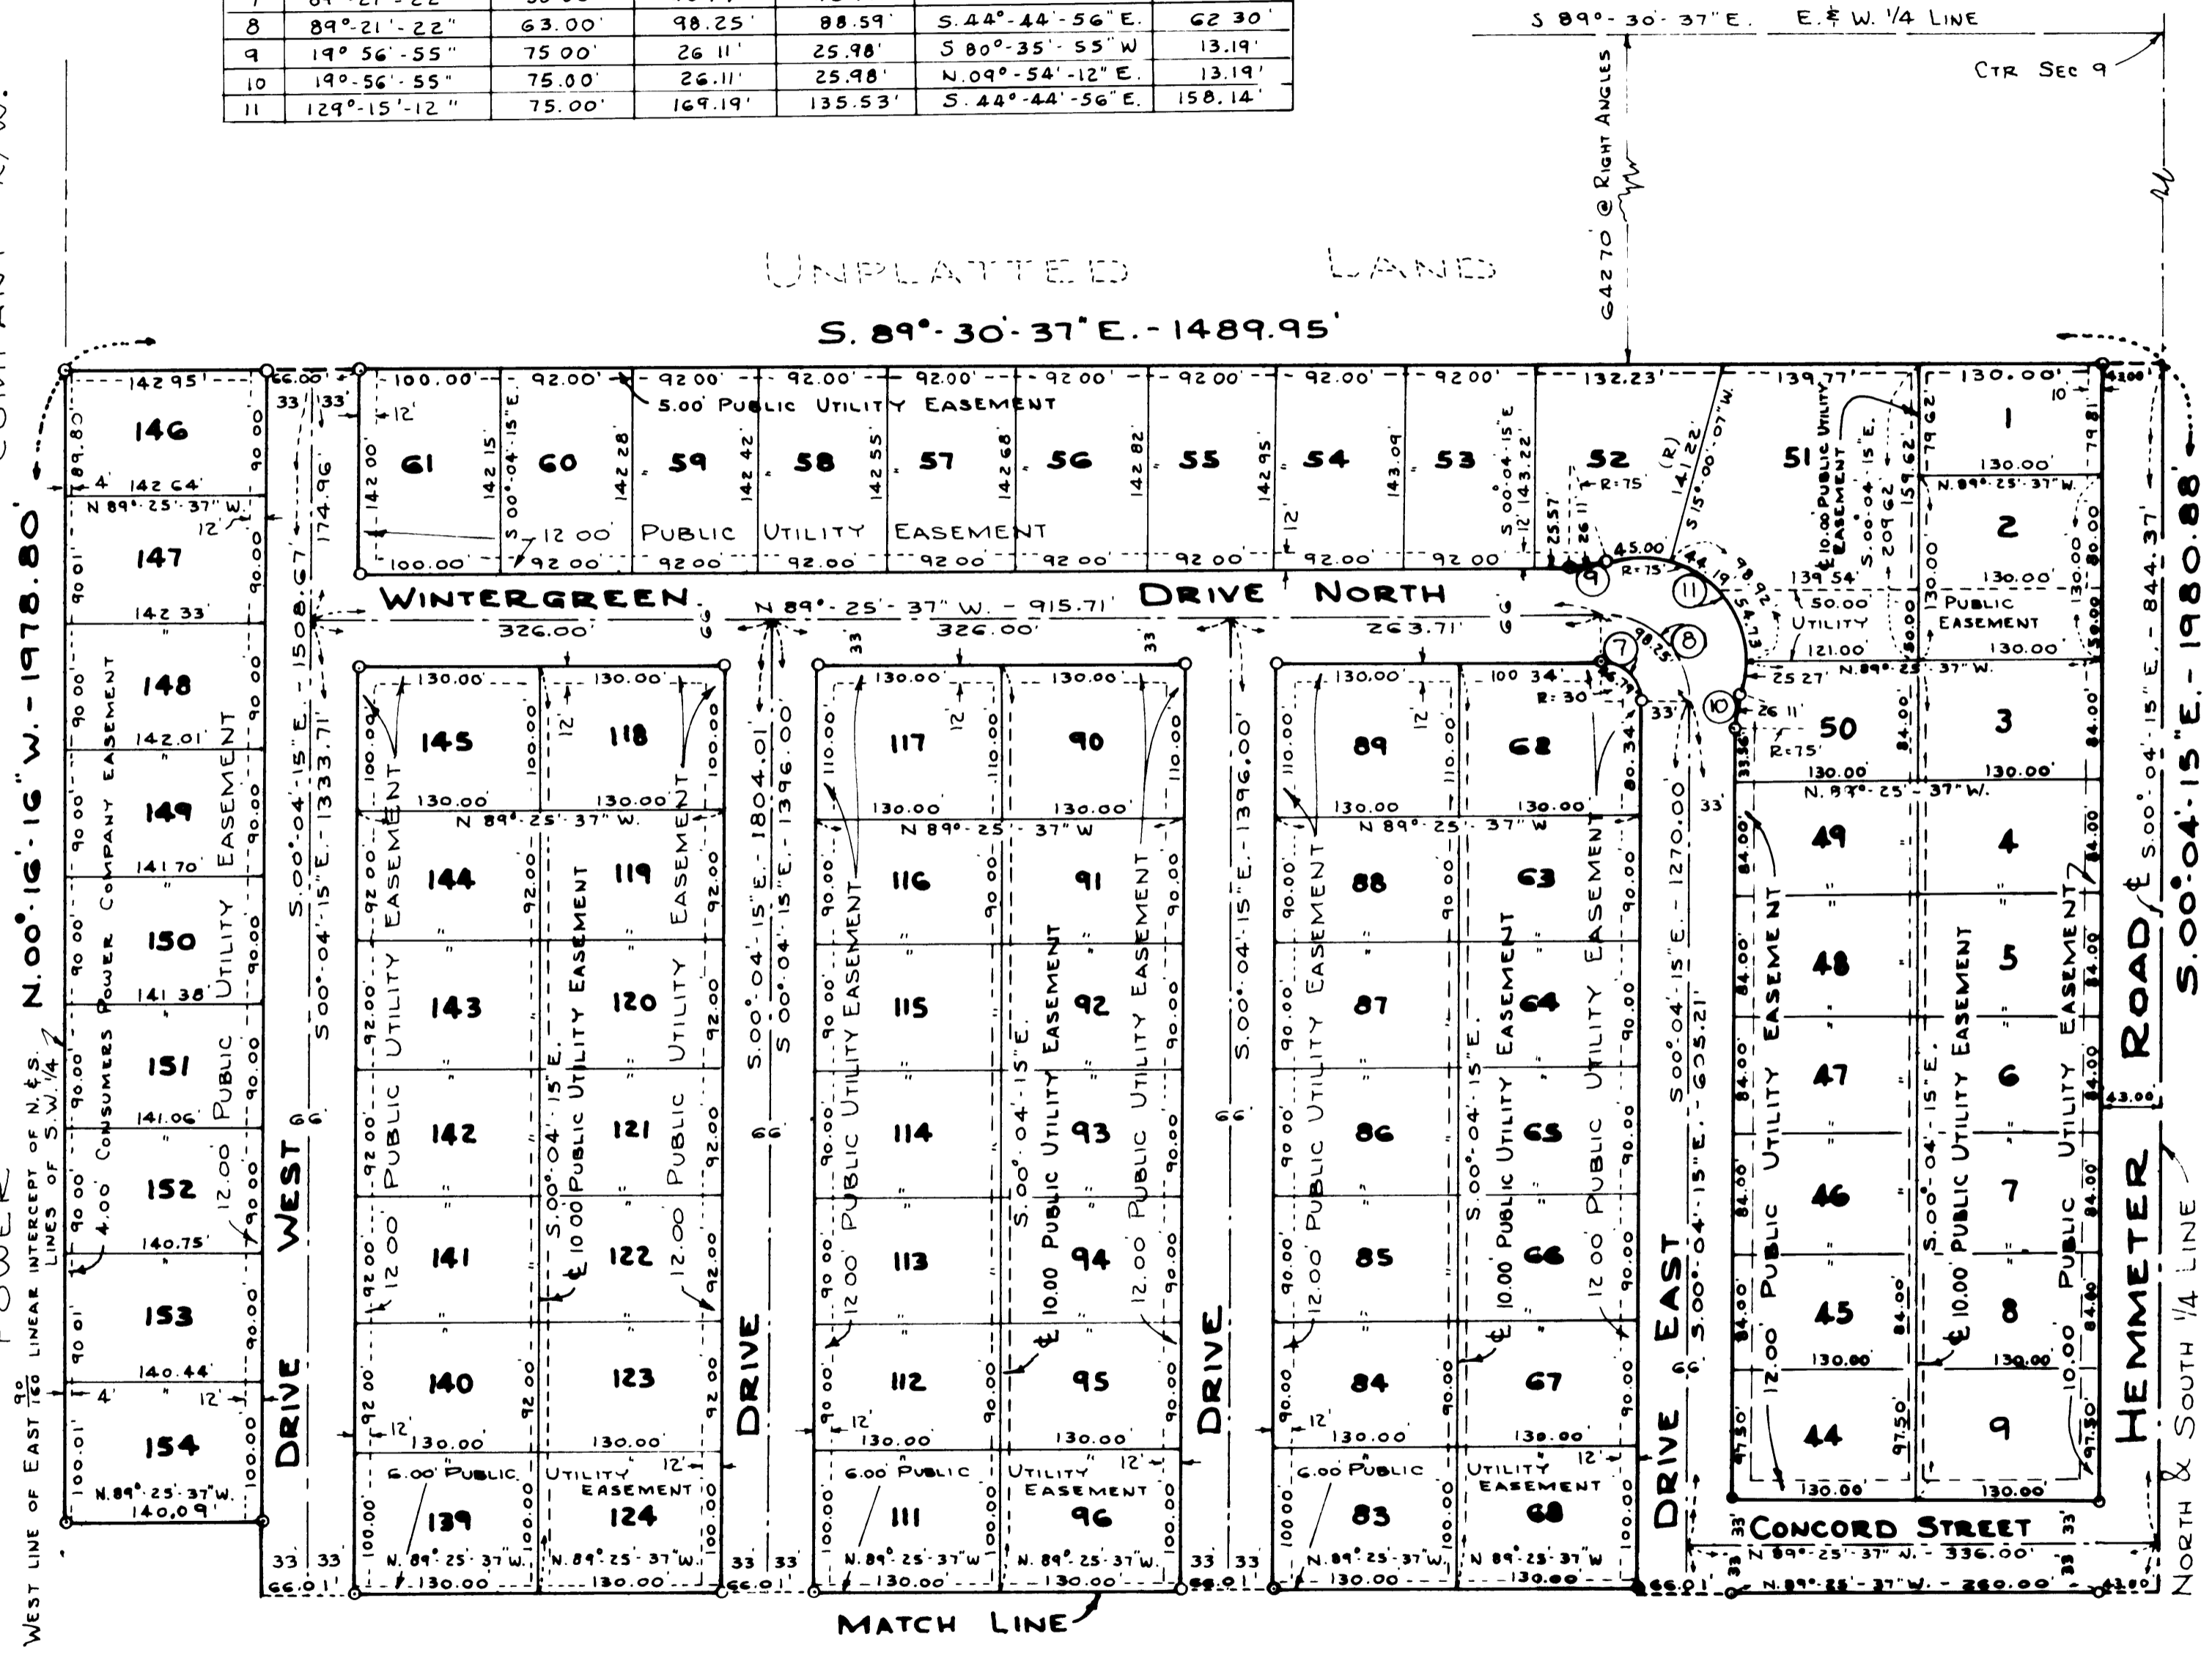

- 1 - ALL DIMENSIONS ARE GIVEN IN FEET
- 2 - ALL CURVILINEAR MEASUREMENTS ARE ARC DISTANCES
- 3 - CONCRETE MONUMENTS HAVE BEEN PLACED AT ALL POINTS MARKED "O"
- 4 - SET SOLID IRON BARS 1/2" IN DIA. BY 18" IN LENGTH AT ALL LOT CORNERS
- 5 - BEARINGS ARE TRUE AS DETERMINED FROM A SOLAR OBSERVATION ON 3-12-70
- 6 - (C) INDICATES CURVE NUMBER (SEE CURVE DATA TABLE HEREON)
- 7 - (R) INDICATES RADIAL LINE