
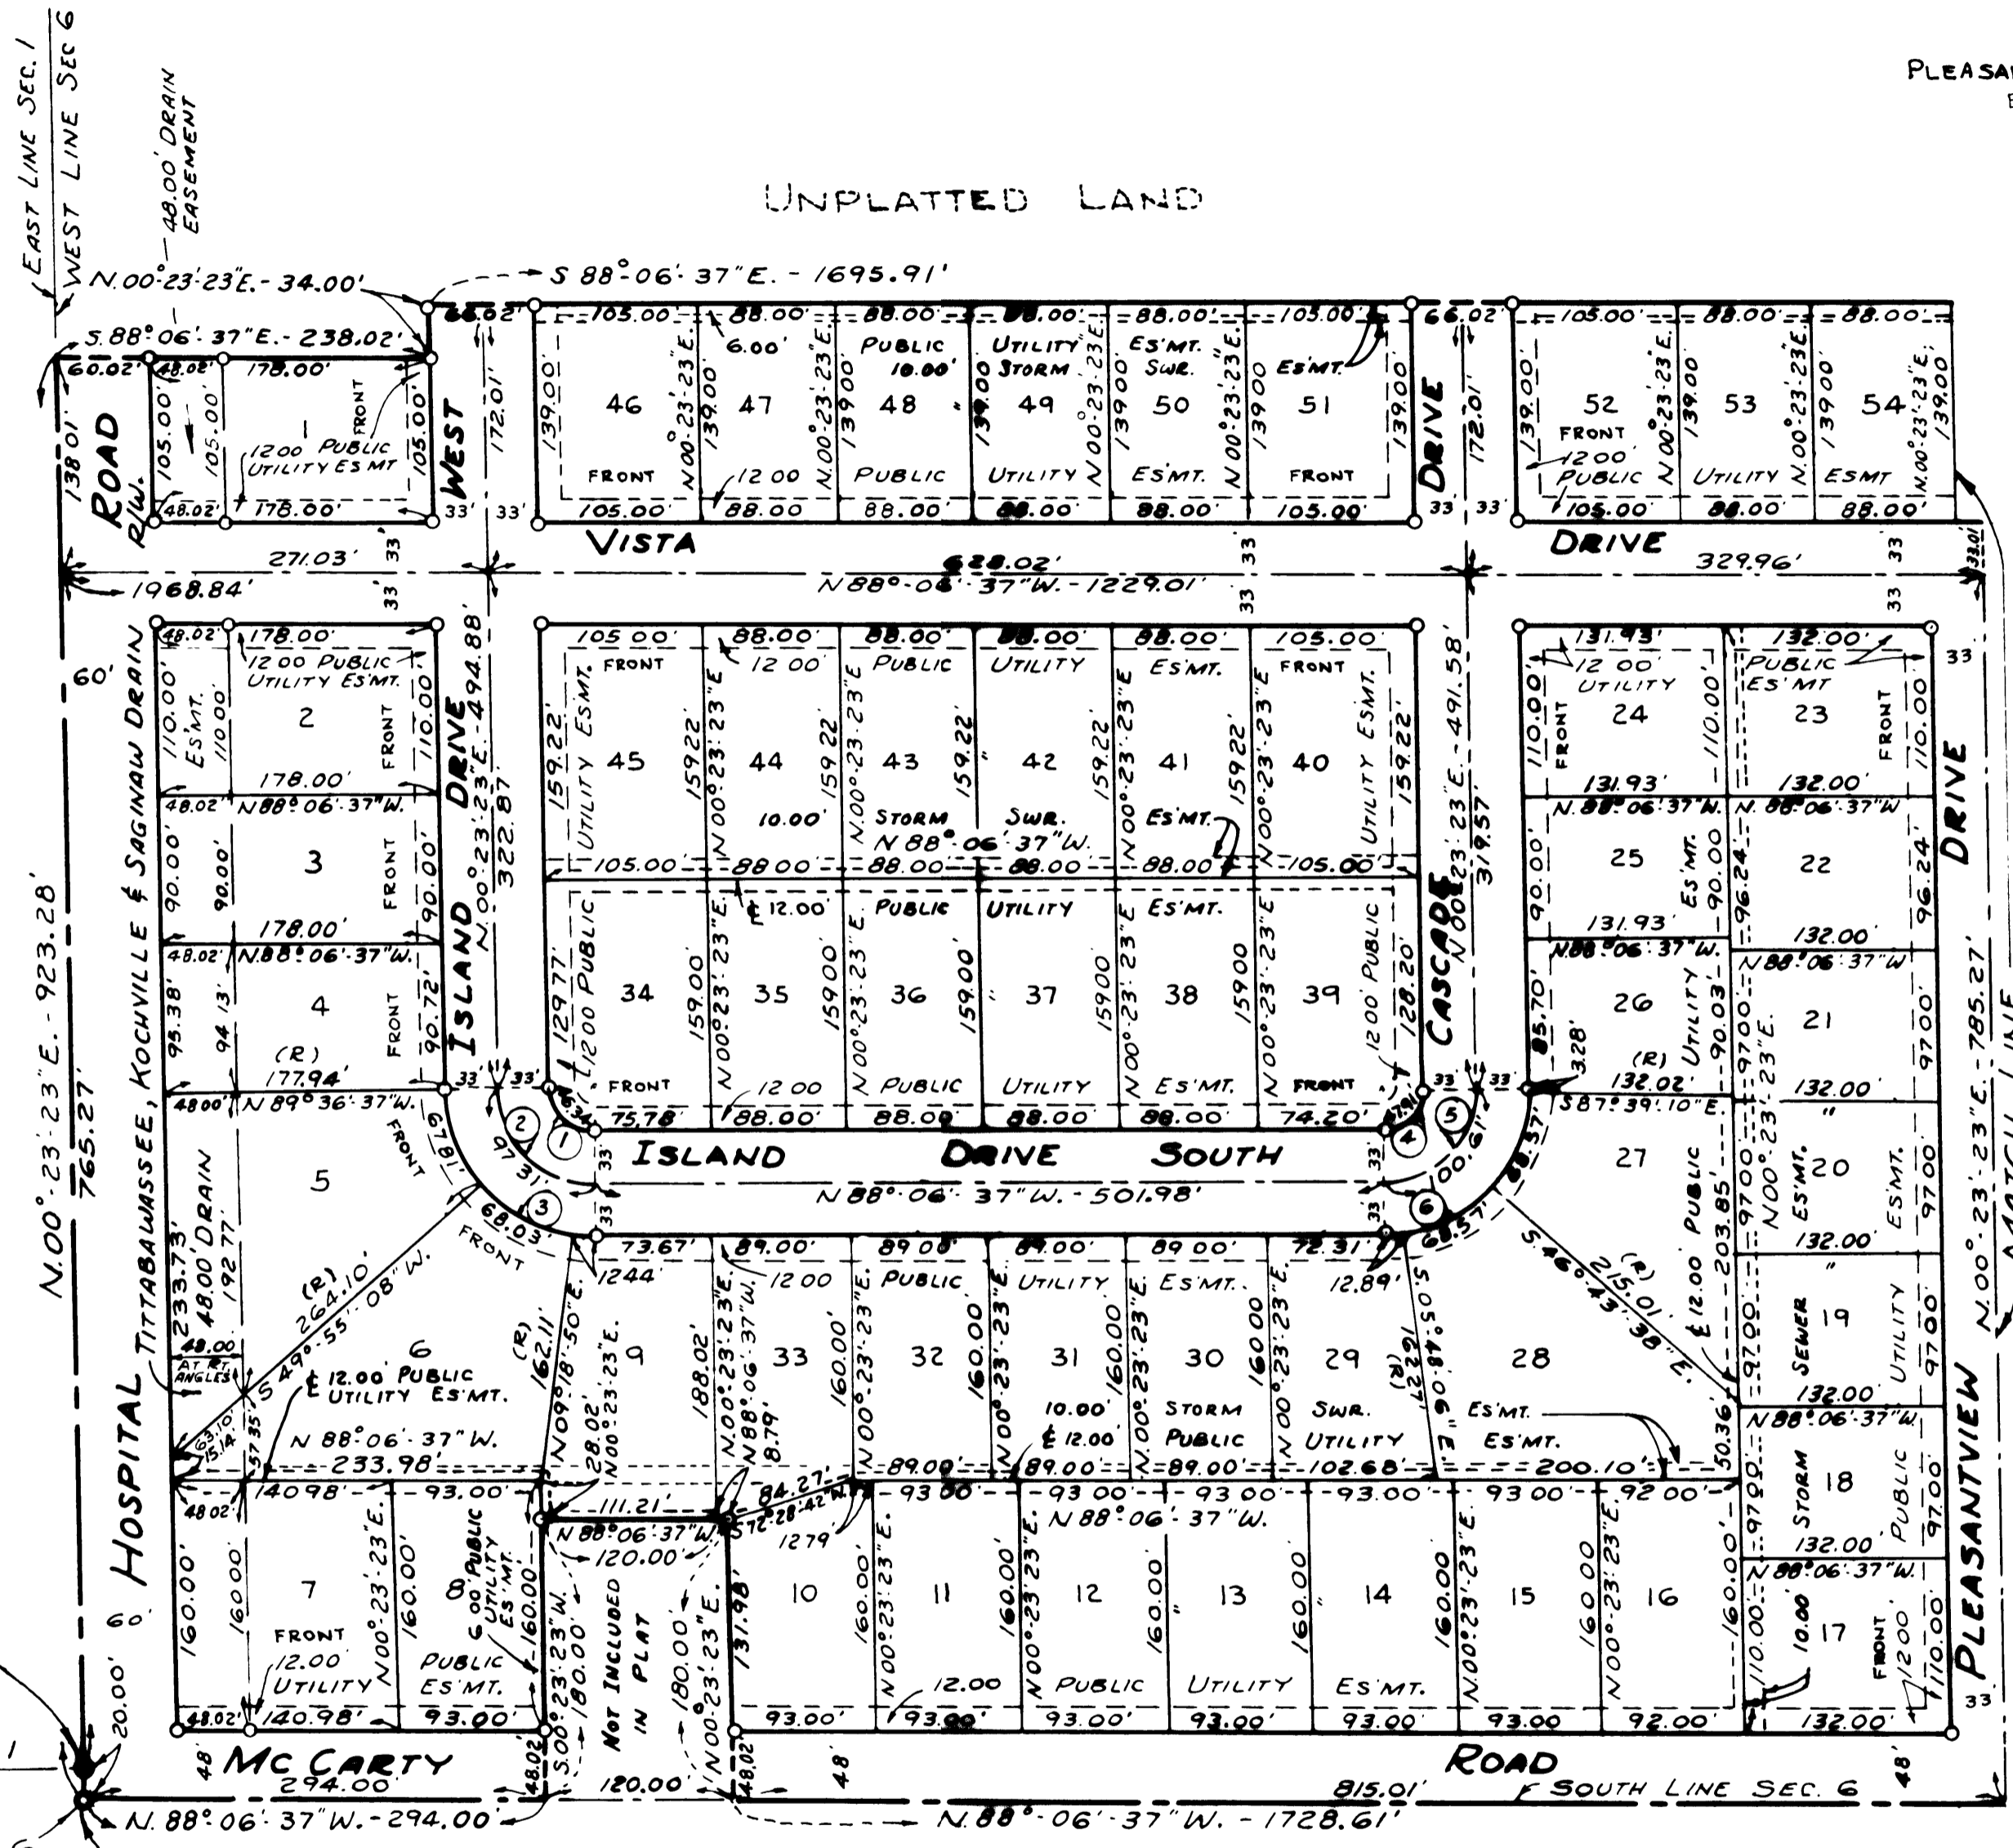


PLEASANTVIEW ESTATES

PART OF THE SOUTHWEST 1/4 OF FRACTIONAL SECTION 6, T.12N.-R.4E.
SAGINAW TOWNSHIP, SAGINAW COUNTY, MICHIGAN

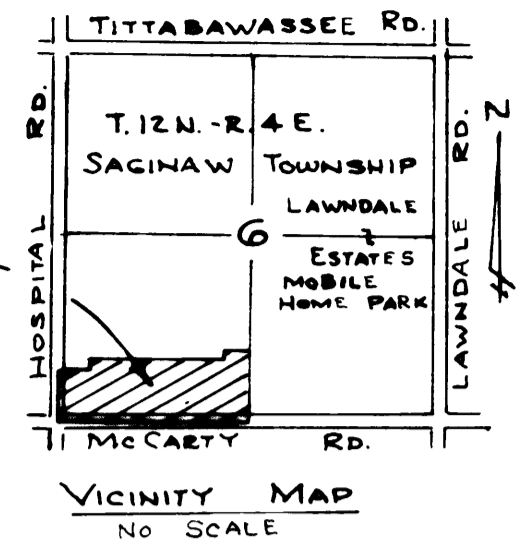

SE. COR. SEC. 1,
T.12N.-R.3E.,
SAGINAW TOWNSHIP

POINT OF BEGINNING


SW. COR. SEC. 6,
T.12N.-R.4E.,
SAGINAW TOWNSHIP,
SAGINAW CO., MICHIGAN

CURVE DATA						
NO	DELTA ANGLE	RADIUS	ARC	CHORD	CH. BEARING	TANGENT
1	88°-30'-00"	30.00'	46.34'	41.87'	N.43°-51'-37"W.	29.23'
2	88°-30'-00"	63.00'	97.31'	87.92'	N.43°-51'-37"W.	61.37'
3	88°-30'-00"	96.00'	148.28'	133.98'	N.43°-51'-37"W.	93.52'
4	91°-30'-00"	30.00'	47.91'	42.98'	S.46°-08'-23"W.	30.80'
5	91°-30'-00"	63.00'	108.61'	90.25'	S.46°-08'-23"W.	64.67'
6	91°-30'-00"	96.00'	159.31'	137.53'	S.46°-08'-23"W.	98.55'
7	92°-07'-50"	30.00'	48.28'	43.21'	N.45°-49'-28"E.	31.14'
8	92°-07'-50"	63.00'	101.38'	90.74'	N.45°-49'-28"E.	65.39'
9	92°-07'-50"	96.00'	158.37'	138.27'	N.45°-49'-28"E.	99.64'



John W. Martin
JOHN W. MARTIN

SEE
SHEET 2

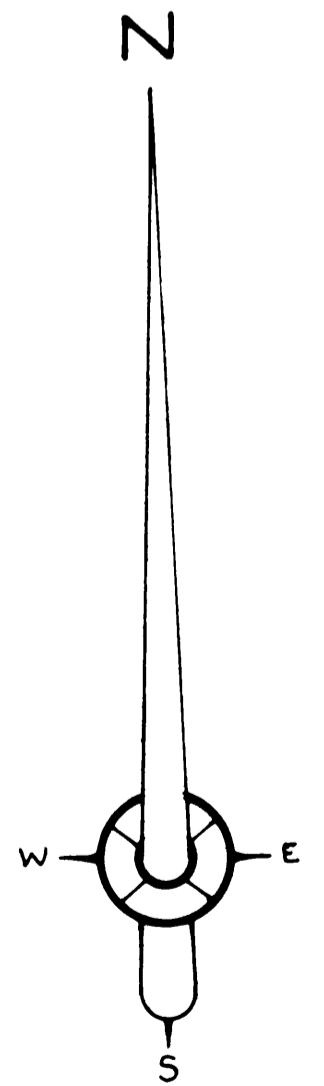

LEGEND

- 1- ALL DIMENSIONS ARE GIVEN IN FEET
- 2- CONCRETE MONUMENTS HAVE BEEN PLACED AT ALL POINTS MARKED "O"
- 3- SET SOLID IRON BARS 1/2" DIA. BY 18" IN LENGTH AT ALL LOT CORNERS
- 4- ALL CURVILINEAR MEASUREMENTS ARE ARC DISTANCES
- 5-(R) INDICATES A RADIAL LINE
- 6- BEARINGS ARE TRUE AS DETERMINED FROM AN OBSERVATION OF POLARIS ON SEPTEMBER 22, 1979