
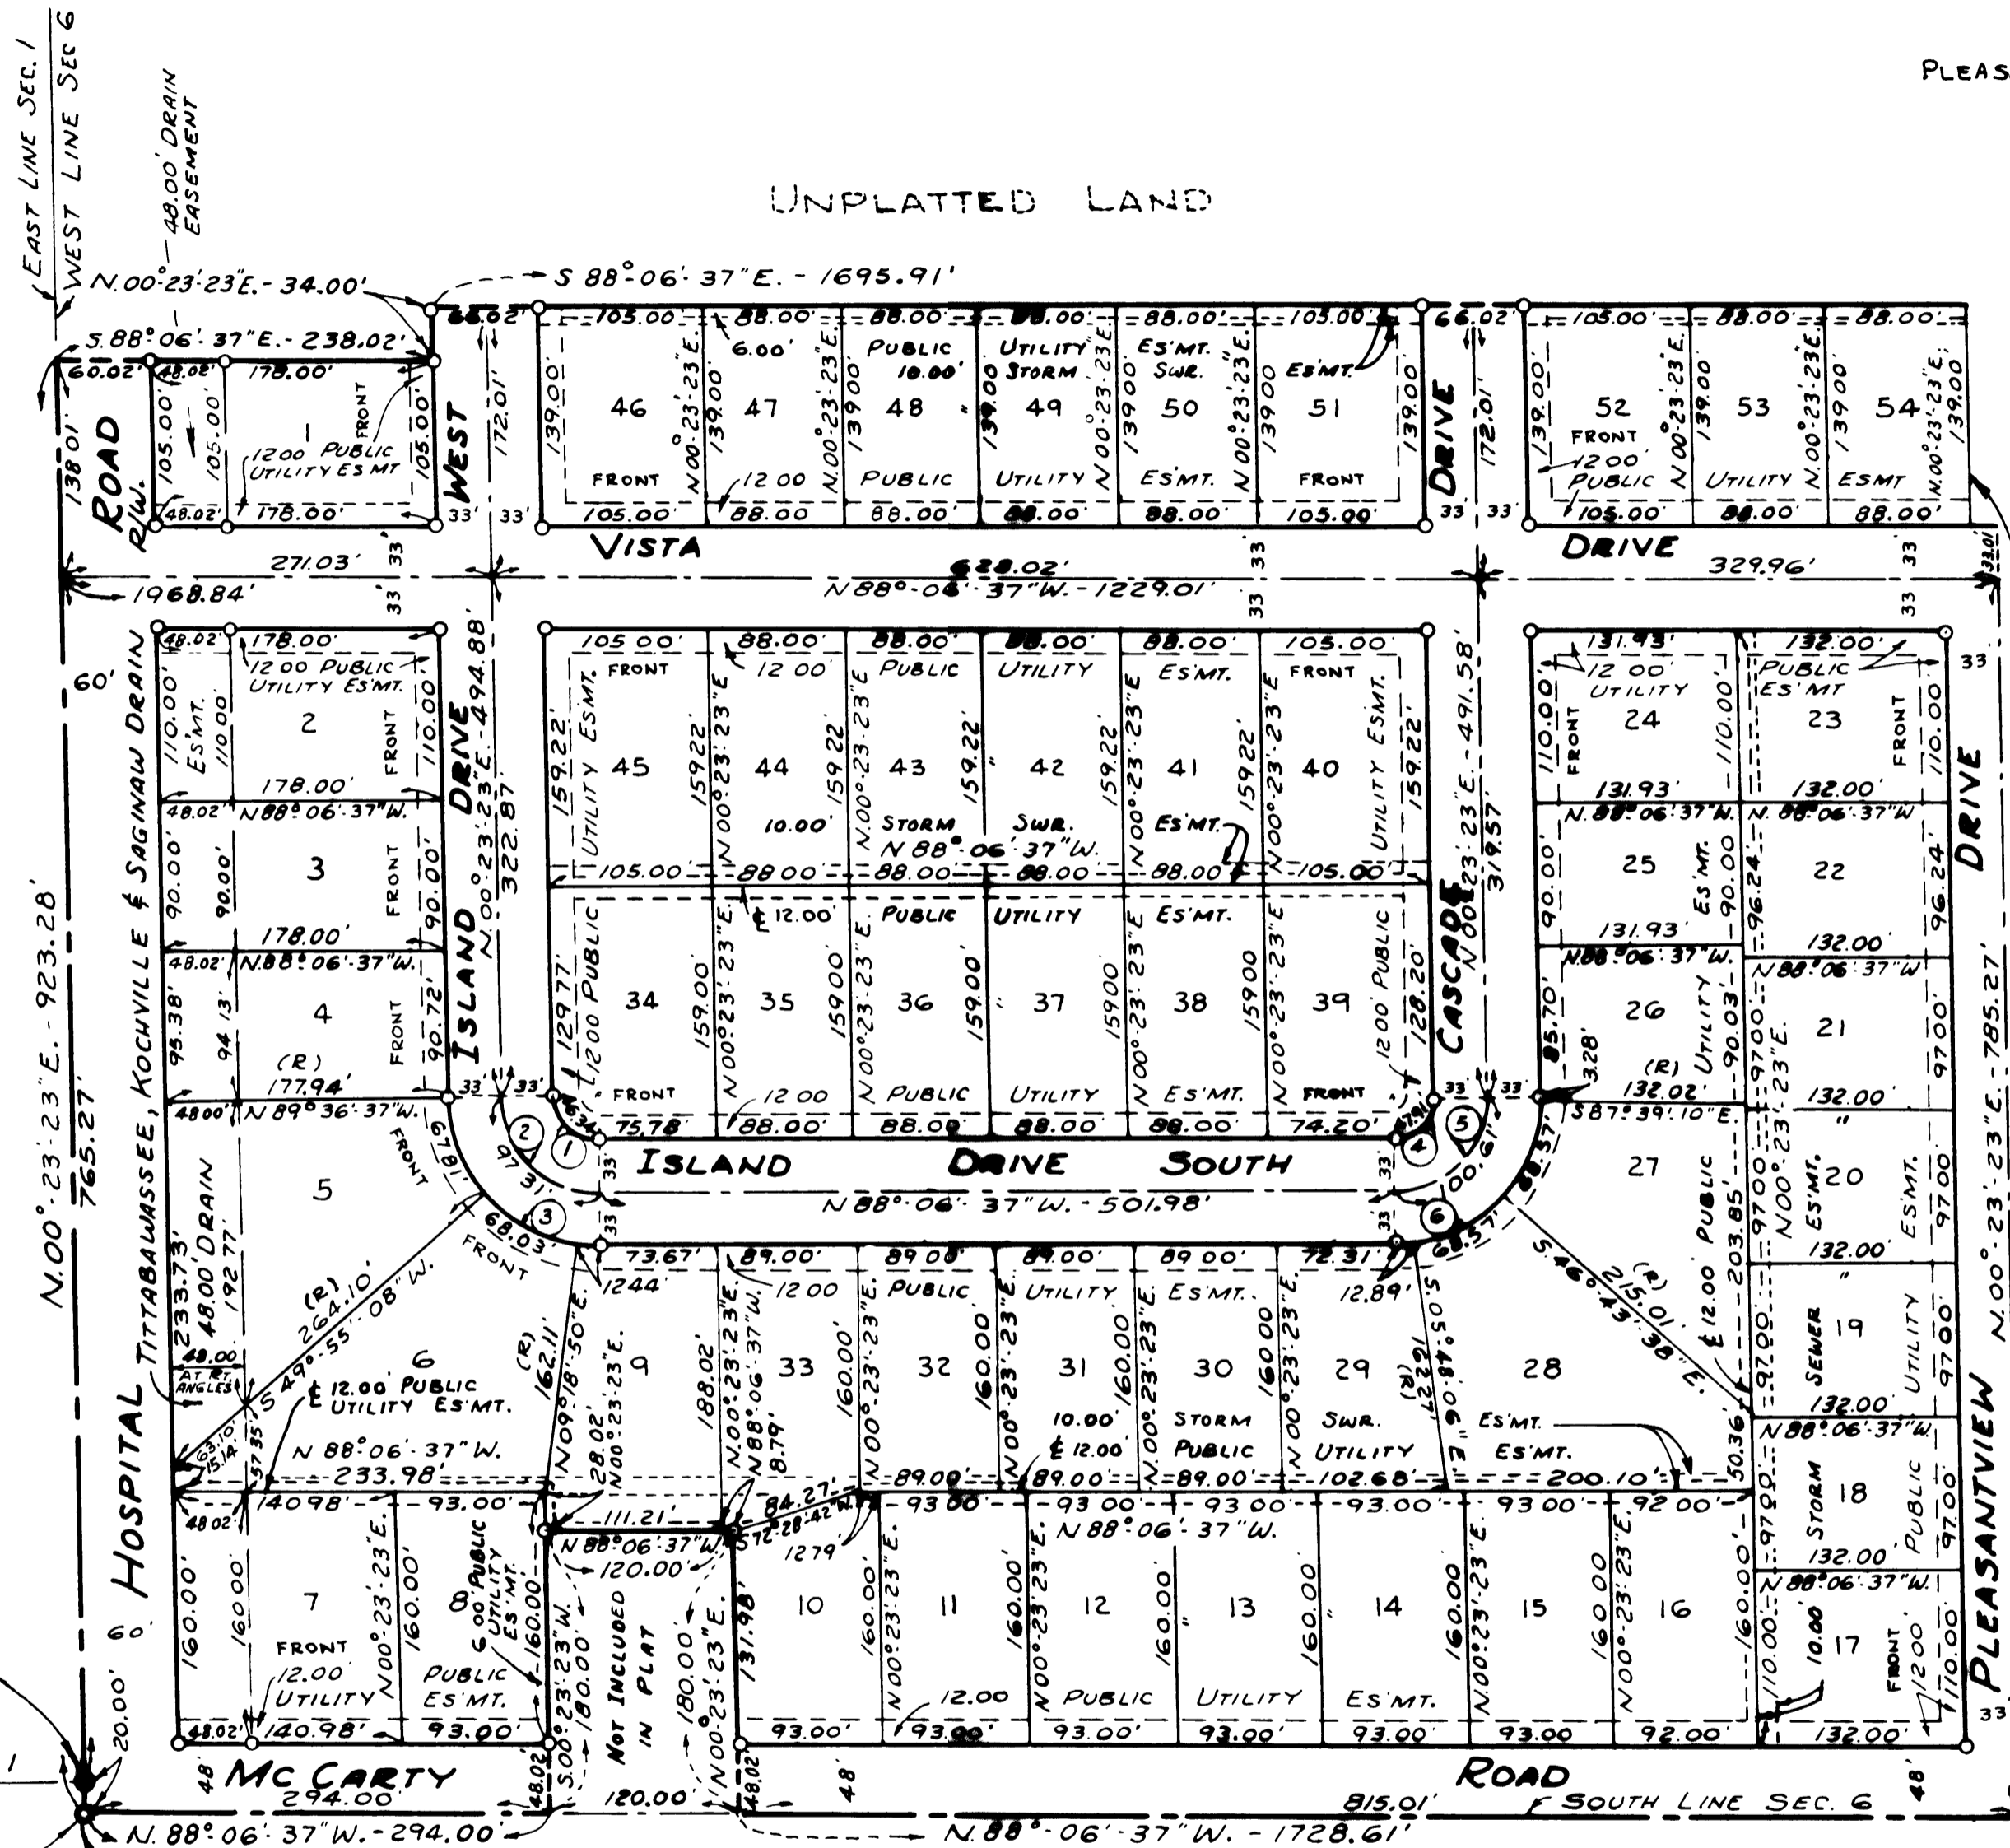



PLEASANTVIEW ESTATES

PART OF THE SOUTHWEST 1/4 OF FRACTIONAL SECTION 6, T.12N.-R.4E.
SAGINAW TOWNSHIP, SAGINAW COUNTY, MICHIGAN

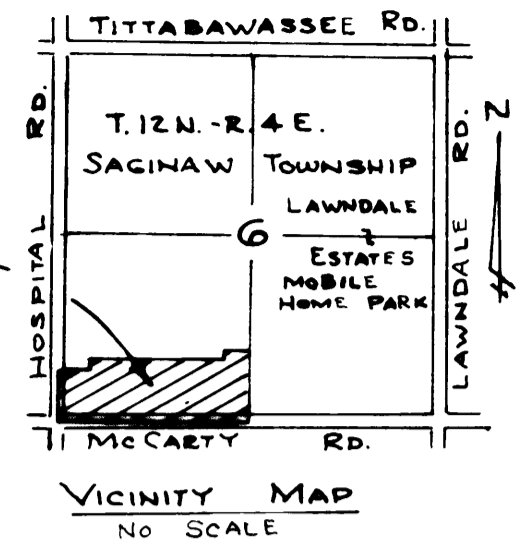

John W. Martin
JOHN W. MARTIN

SEE SHEET 2

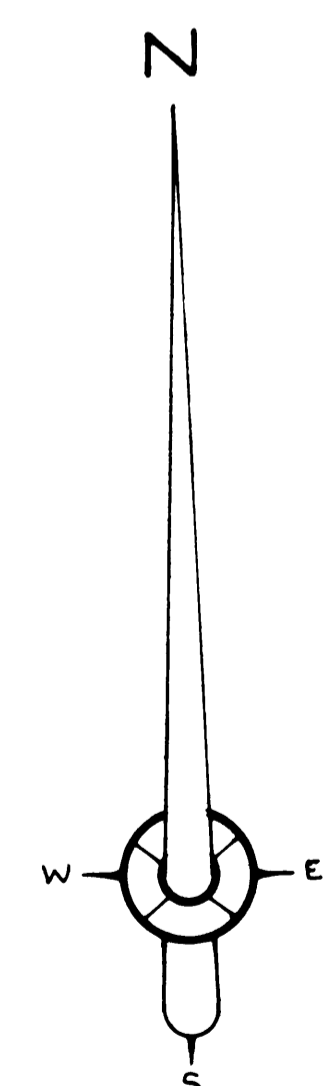

SE. COR. SEC. 1,
T.12N.-R.3E.,
SAGINAW TOWNSHIP

SOUTH LINE SEC. 1

SW. COR. SEC. 6,
T.12N.-R.4E.,
SAGINAW TOWNSHIP,
SAGINAW CO., MICHIGAN

POINT OF BEGINNING

CURVE DATA

No	DELTA ANGLE	RADIUS	ARC	CHORD	CH. BEARING	TANGENT
1	88°-30'-00"	30.00'	46.34'	41.87'	N.43°51'-37"W.	29.23'
2	88°-30'-00"	63.00'	97.31'	87.92'	N.43°51'-37"W.	61.37'
3	88°-30'-00"	96.00'	148.28'	133.98'	N.43°51'-37"W.	93.52'
4	91°-30'-00"	30.00'	47.91'	42.98'	S.46°08'-23"W.	30.80'
5	91°-30'-00"	63.00'	108.61'	90.25'	S.46°08'-23"W.	64.67'
6	91°-30'-00"	96.00'	153.31'	137.53'	S.46°08'-23"W.	98.55'
7	92°-07'-50"	30.00'	48.28'	43.21'	N.45°49'-28"E.	31.14'
8	92°-07'-50"	63.00'	101.38'	90.74'	N.45°49'-28"E.	65.39'
9	92°-07'-50"	96.00'	158.37'	138.27'	N.45°49'-28"E.	99.64'

LEGEND
 1- ALL DIMENSIONS ARE GIVEN IN FEET
 2- CONCRETE MONUMENTS HAVE BEEN PLACED AT ALL POINTS MARKED "O"
 3- SET SOLID IRON BARS 1/2" DIA. BY 18" IN LENGTH AT ALL LOT CORNERS
 4- ALL CURVILINEAR MEASUREMENTS ARE ARC DISTANCES
 5-(R) INDICATES A RADIAL LINE
 6- BEARINGS ARE TRUE AS DETERMINED FROM AN OBSERVATION OF POLARIS ON SEPTEMBER 22, 1979